
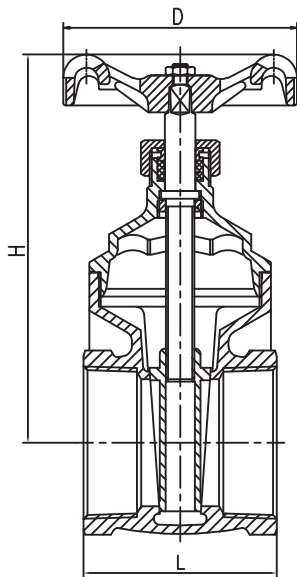


**CLASS 150**

Bronze NRS Gate Valve (Threaded)

Fig. 3152

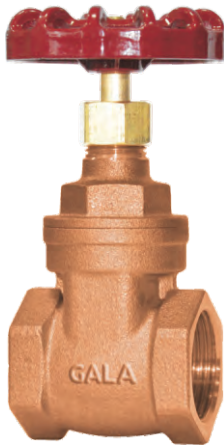

**Specification**

MSS SP-80  
 Screwed-In bonnet • Solid Wedge Disc  
 Non-Rising Stem • Integral Seat • Asbestos Free  
 Threaded to BS 21 (ISO7) / ASME B1.20.1  
 Size Range: 15mm(1/2")~100mm(4")

**Pressure Ratings**

Working Pressure	300 psi (20.7 bar) WOG Non-Shock 150 psi (10.3 bar) Saturated Steam
Testing Pressure	Shell: 450 psi (31 bar) Hydrostatic Seat: 330 psi (22.7bar) Hydrostatic 80 psi (5.5 bar) Air
Suitable Media	Water, Oil, Gas

**Material List**

Part Name	Material	ASTM	BS
Body	Bronze (Gunmetal)	B62 C83600	1400 LG2
Bonnet	Bronze (Gunmetal)	B62 C83600	1400 LG2
Disc	Bronze (Gunmetal)	B62 C83600	1400 LG2
Stem	Brass Rod	B124 C38800	2874 CZ122
Packing	PTFE		
Packing Nut	Brass Rod	B124 C38800	2874 CZ122
Gland	Brass Rod	B124 C38800	2874 CZ122
Handwheel	Cast Iron	A48 No.35	1452 Gr.260
Gasket	Non Asbestos		

**Dimension**

DN	mm	15	20	25	32	40	50	65	80	100
	Inch	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4
L		43	49	54	62	65	75	87	105	124
H		78	92	103	116	133	156	190	215	258
D		52	60	60	70	78	92	100	110	130